


Art.	Heating capacity 55/45/20°C (W)	Heating capacity 75/65/20°C (W)	Total weight, inc. components and packaging (kg)
HY15047**	234	490	26



Piping connection points:



Attention!
For vertical installation, the use of a diverter is
necessary. See Installation guide.

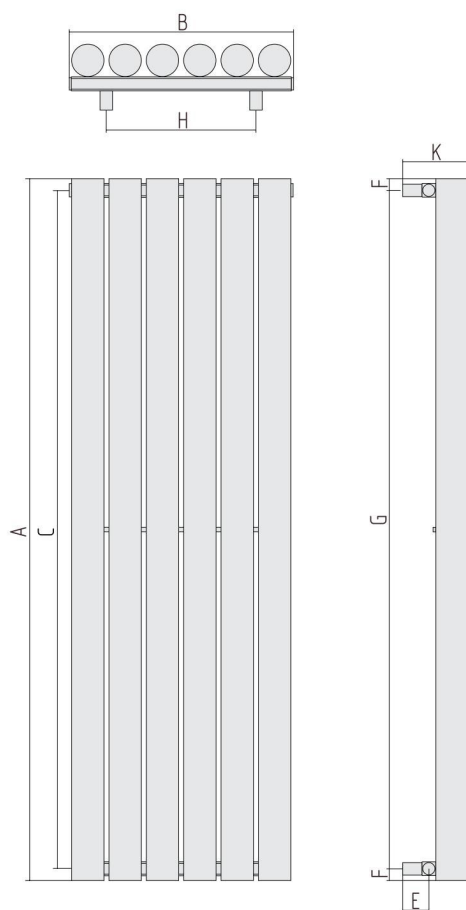

Art.	A	B	C	E	F	G	H	K
HY15047**	1500	470	1450	55-80	25	1450	320	140-165

Colour range



**P
Polished Stainless Steel