Lacerta

WarmDesign

Art.	Heating capacity 55/45/20°C (W)	Heating capacity 75/65/20°C (W)	Total weight, inc. components and packaging (kg)	Recommended capacity of electric heating element (W)
LA7750**	105	202	7,2	300
LA11850**	158	304	10,7	300



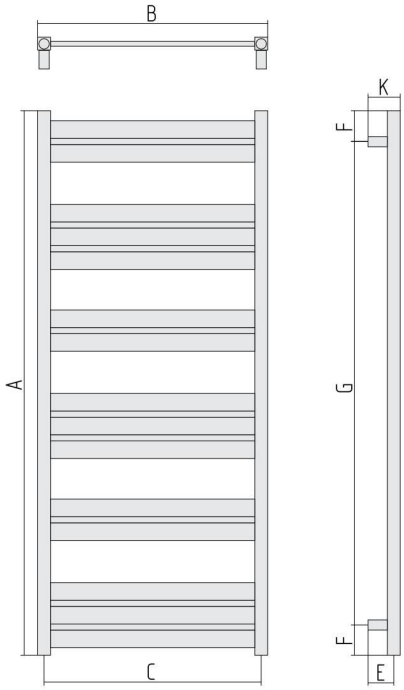

Water

Electric

Piping connection points:

CE EN 442 EURONORM

Attention!
An electric element should be mounted only at the bottom of the collector. Use the radiator only in vertical position – with an electric element at the bottom.



Brushed stainless steel with polished deco bars

Art.	A	B	C	E	F	G	K
LA7750**	770	500	470	55-80	65	640	70-95
LA11850**	1180	500	470	55-80	65	1050	70-95

Colour range



**B
Brushed Stainless Steel